


Technical data sheet

S4 Sealband Euro EPDM rollable chimney flashing strip

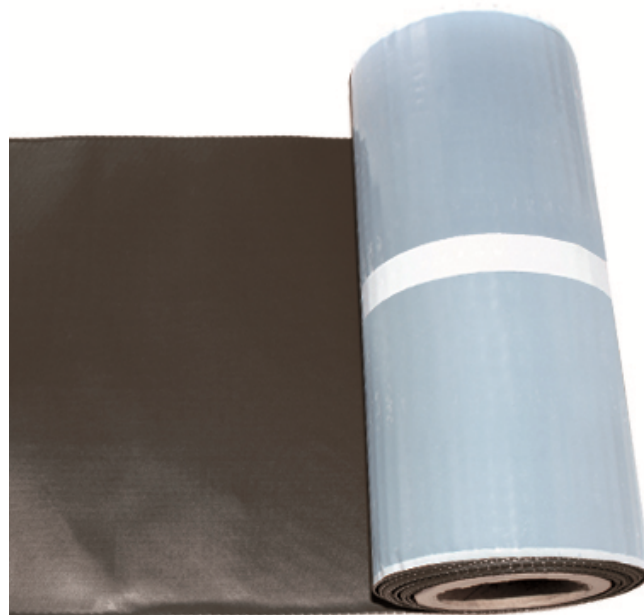

Characteristic	Unit	Value
Reaction to fire	class	E
Watertightness	10 kPa, met B	Watertight
Tensile properties: - in longitudinal direction - in transverse direction	N/50 mm N/50 mm	≥ 160 ≥ 290
Elongation: - in longitudinal direction - in transverse direction	% %	≥ 48 ≥ 12
Resistance to static loading	kg	≥ 5
Resistance to impact	mm	≥ 200
Tear resistance: - in longitudinal direction - in transverse direction	N N	≥ 55 ≥ 80
Joint shearing strength: - transverse overlapping - longitudinal overlapping	N/50 mm N/50 mm	≥ 50 ≥ 62
Joint stripping strength: - in longitudinal direction - in transverse direction	N/50 mm N/50 mm	≥ 5 ≥ 5
UV exposure	1000 h	Fulfills test requirements
Flexibility at low temperature	°C	≤ -40
Dangerous substances	-	nd